



DESCRIPTION

The 2N4921, 2N4922 and 2N4923 are silicon epitaxial planar NPN transistors in Jedo TO-126 plastic package, they are intended for driver circuits, switching and amplifier applications. The complementary PNP types are the 2N4918, 2N4919 and 2N4920 respectively.

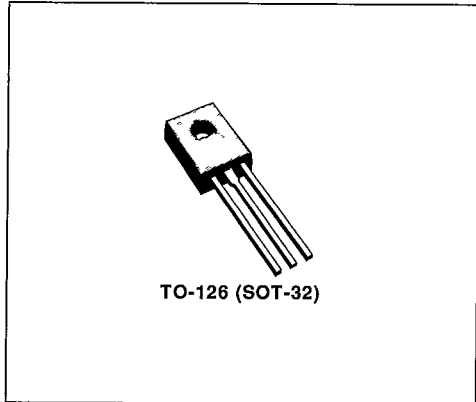

INTERNAL SCHEMATIC DIAGRAMS

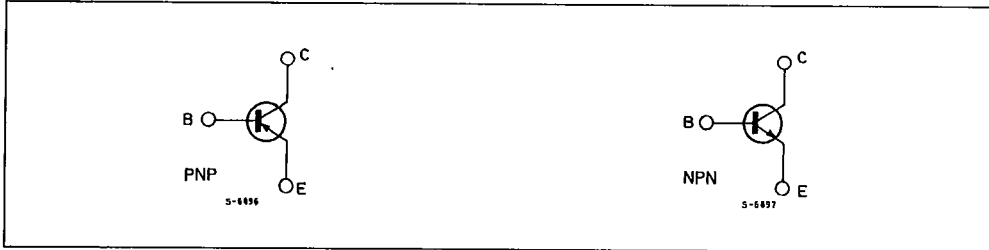

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	PNP	2N4918	2N4919	2N4920	Unit
		NPN	2N4921	2N4922	2N4923	
V _{CEO}	Collector-emitter Voltage (I _B = 0)		40	60	80	V
V _{CBO}	Collector-base Voltage (I _E = 0)		40	60	80	V
V _{EBO}	Emitter-base Voltage (I _C = 0)		5			V
I _C	Collector Current		1			A
I _{CM}	Collector Peak Current		3			A
I _B	Base Current		1			A
P _{tot}	Total Power Dissipation at T _{case} ≤ 25 °C		30			W
T _{stg}	Storage Temperature		- 65 to 150			°C
T _j	Junction Temperature		150			°C

* For PNP types voltage and current values are negative.

THERMAL DATA

S G S-THOMSON

30E D

$R_{th\ j-case}$	Thermal Resistance Junction-case	Max	4.16	°C/W
------------------	----------------------------------	-----	------	------

T-33-09



ELECTRICAL CHARACTERISTICS ($T_{case} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CEO}	Collector Cutoff Current ($I_{BO} = 0$)	$V_{CE} = \text{Half rated } V_{CEO}$			0.5	mA
I_{CEX}	Collector Cutoff Current ($V_{BE} = -1.5\text{ V}$)	$V_{CE} = \text{rated } V_{CEO}$ $V_{CE} = \text{rated } V_{CEO}$ $T_{case} = 125\text{ }^{\circ}\text{C}$			0.1 0.5	mA mA
I_{CBO}	Collector Cutoff Current ($I_E = 0$)	$V_{CE} = \text{rated } V_{CBO}$			0.1	mA
I_{EBO}	Emitter Cutoff Current ($I_C = 0$)	$V_{EB} = 5\text{ V}$			1	mA
$V_{CEO(sus)}^*$	Collector-emitter Sustaining Voltage	$I_C = 0.1\text{ A}$ for 2N4918, 2N4921 for 2N4919, 2N4922 for 2N4920, 2N4923	40 60 80			V V V
h_{FE}^*	DC Current Gain	$I_C = 50\text{ mA}$ $V_{CE} = 1\text{ V}$ $I_C = 500\text{ mA}$ $V_{CE} = 1\text{ V}$ $I_C = 1\text{ A}$ $V_{CE} = 1\text{ V}$	40 30 10		150	
$V_{CE(sat)}^*$	Collector-emitter Saturation Voltage	$I_C = 1\text{ A}$ $I_B = 0.1\text{ A}$			0.6	V
$V_{BE(sat)}^*$	Base-emitter Saturation Voltage	$I_C = 1\text{ A}$ $I_B = 0.1\text{ A}$			1.3	V
V_{BE}^*	Base Emitter Voltage	$I_C = 1\text{ A}$ $V_{CE} = 1\text{ V}$			1.3	V
f_T	Transistion Frequency	$I_C = 250\text{ mA}$ $V_{CE} = 10\text{ V}$ $f = 1\text{ MHz}$	3			MHz
C_{CBO}	Collector-base Capacitance	$V_{CB} = 10\text{ V}$ $f = 100\text{ KHz}$ $I_E = 0$			100	pF
h_{FE}	Small Signal Current Gain	$I_C = 250\text{ mA}$ $V_{CE} = 10\text{ V}$ $f = 1\text{ KHz}$	25			


* Pulsed : pulse duration = 300µs duty cycle ≤ 2%.
For NPN types voltage and current values are negative.

Safe Operating Areas.


DC Current Gain (NPN types).

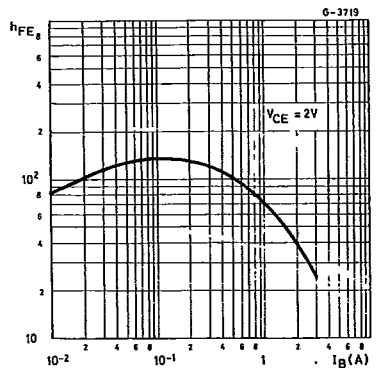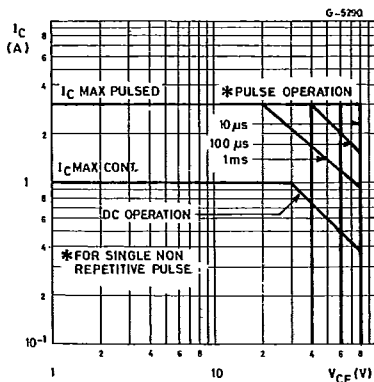


DC Current Gain (PNP types).

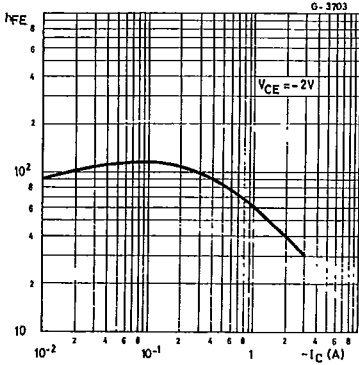


DC Transconductance (NPN types).

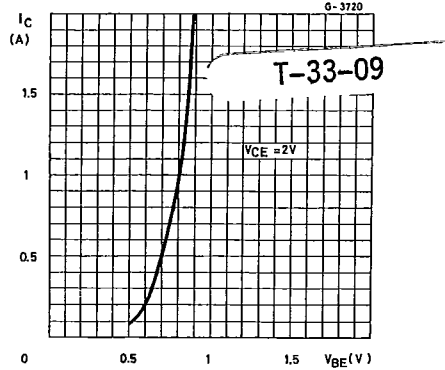


DC Transconductance (PNP types).

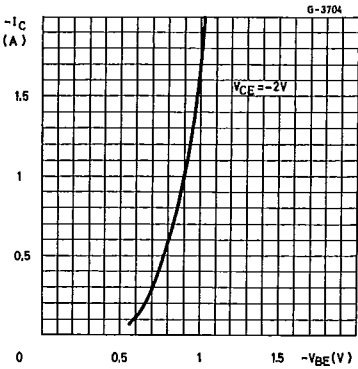


Collector-emitter Saturation Voltage (NPN types).

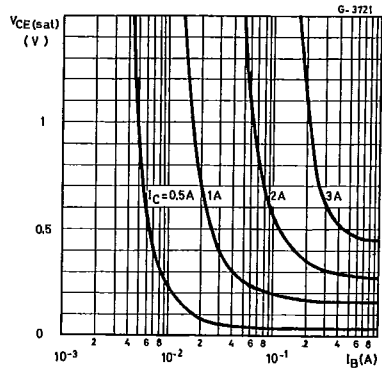

Collector-emitter Saturation Voltage (NPN types).

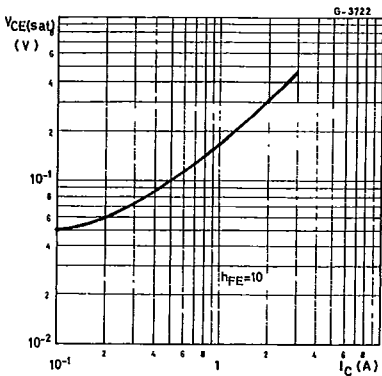


Collector-emitter Saturation Voltage (PNP types).

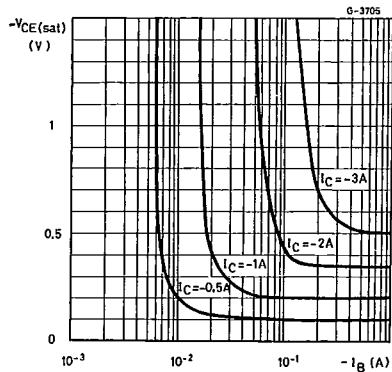


SGS-THOMSON

30E D


Collector-emitter Saturation Voltage (PNP types).

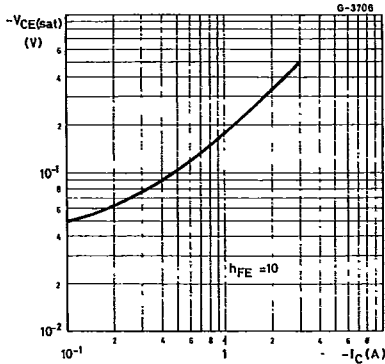


Base-emitter Saturation Voltage (NPN types).

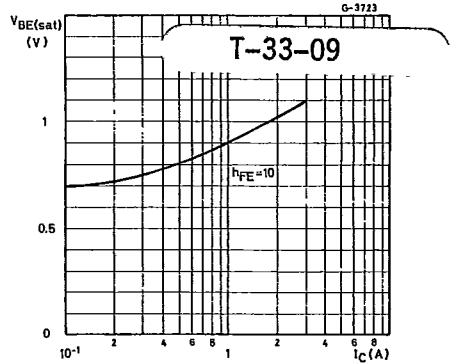


Base-emitter Saturation Voltage (PNP types).

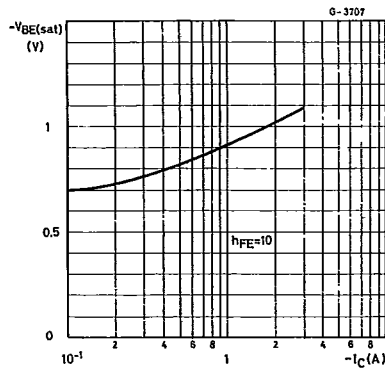

Saturated Switching Characteristics (NPN types).

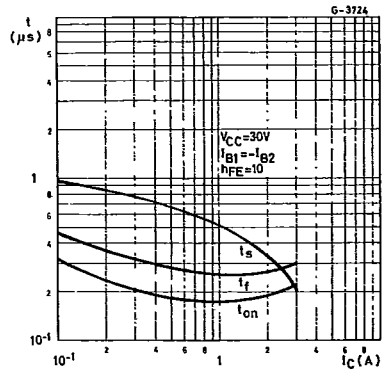

Saturated Switching Characteristics (PNP types).

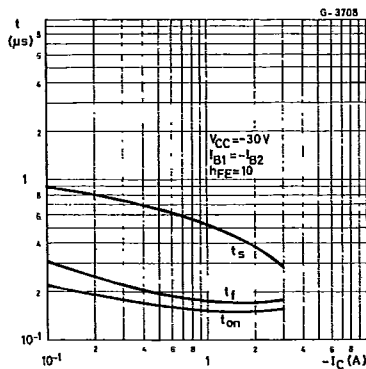

SGS-THOMSON

30E D